



Nylon Web Slings

PROPERTIES

- Resistant to alkalis
- Untreated—approx. 6% stretch, treated—approx. 10% stretch at rated capacity
- Temperature limit is 180°F
- Contains red warning yarns
- Subject to damage by sharp edges

Ratings based on straight pin diameter one-half the sling width.

TYPE 1 SLINGS
Choker & Basket Hitch
Triangle & Choker Fittings

TYPE 2 SLINGS
Basket & Vertical Hitches Only
Two Triangle Fittings

TYPE 3 & 4 SLINGS
Flat or Twisted Eyes
Vertical, Choker, Basket Hitches

TYPE 5 SLINGS
Vertical, Choker, Basket Hitches
Endless or Grommet Type

Web Width	RATED CAPACITIES IN LBS.		
	Vertical	Choker	Basket
SINGLE PLY SLINGS			
2"	3,200	2,560	6,400
3"	4,700	3,760	9,400
4"	6,200	4,960	12,400
6"	9,300	7,440	18,600
8"	12,800	10,240	25,600
10"	16,000	12,800	32,000
12"	19,200	15,360	38,400
TWO PLY SLINGS WITH STEEL HARDWARE			
2"	6,200	4,960	12,400
3"	8,800	7,000	17,600
4"	11,000	8,800	22,000
6"	16,500	13,200	33,000
8"	22,750	18,200	45,500
SINGLE PLY SLINGS			
2"	3,200		6,400
3"	4,700		9,400
4"	6,200		12,400
6"	9,300		18,600
8"	12,800		25,600
10"	16,000		32,000
12"	19,200		38,400
TWO PLY SLINGS WITH STEEL HARDWARE			
2"	6,200		12,400
3"	8,800		17,600
4"	11,000		22,000
6"	16,500		33,000
8"	22,750		45,500
SINGLE PLY SLINGS			
1"	1,600	1,280	3,200
2"	3,200	2,560	6,400
3"	4,700	3,760	9,400
4"	6,200	4,960	12,400
6"	9,300	7,440	18,600
8"	12,800	10,240	25,600
TWO PLY SLINGS			
1"	3,100	2,480	6,200
2"	6,200	4,960	12,400
3"	8,800	7,000	17,600
4"	11,000	8,800	22,000
6"	16,500	13,200	33,000
8"	22,700	18,200	45,500
SINGLE PLY SLINGS			
1"	3,200	2,560	6,400
2"	6,200	4,960	12,400
3"	9,400	7,520	18,800
4"	12,400	9,920	24,800
6"	18,600	14,880	37,200
TWO PLY SLINGS			
1"	6,200	4,960	12,400
2"	12,400	9,200	24,800
3"	17,600	14,000	35,200
4"	22,000	17,600	44,000
6"	33,000	26,400	66,000

⚠ WARNING Can fail if damaged, misused or overloaded. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect sling from contact with edges. Avoid exposure to acid, alkali, sunlight and temperature over 180°F. DEATH or INJURY can occur from improper use or maintenance.




Nylon Web Slings

Basic Sling Types


Hitches

Type 1

The Web Fitting functions both as a triangle and choker. No more need to position the sling before choking the load. Fits larger crane hooks than TC and TT sling fittings.


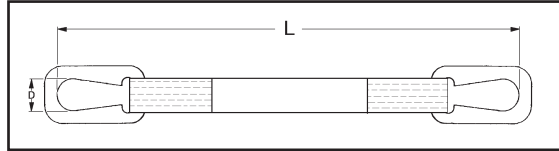


Vertical Choker Basket




Type 1 TC Slings

Slings with a triangle on one end and with a slotted triangle (the choker) on the other end. Choice of lightweight aluminum or durable steel fittings.

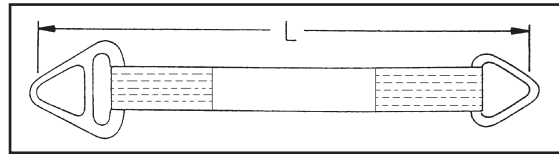


Type 2 TT Slings

Slings with a triangle at both ends. Used in vertical and basket hitches only. Choice of lightweight aluminum or durable steel fittings.

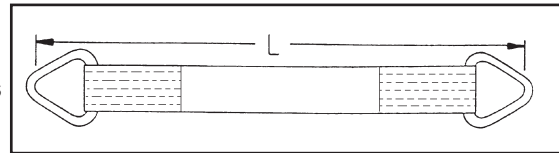



Type 3 EE Slings

Slings with an eye at both ends. Choice of straight or tapered eyes (tapered eyes are standard for 3" web-width and up).

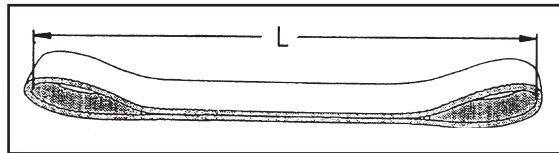



Type 4 EE Slings

Same basic type as Type 3 but eyes are twisted to a right angle to the sling body. (Tapered eyes are standard for 2" web-width and up).

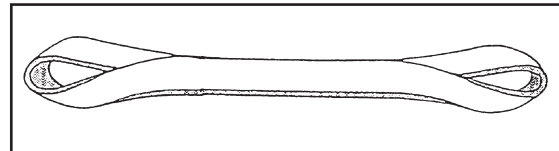


Type 5 EN Slings

Endless slings, sometimes also referred to as grommet slings. The most versatile sling.

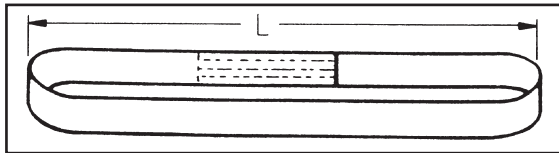

Type 6 RE Slings

Return eye sling, also referred to as reversed eye sling. Sling body is formed by 2 parts of webbing sewn side by side using a cordura tube which protects not only the sling edges, but the entire sling body.

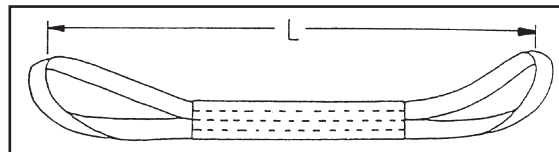

Can fail if damaged, misused or overloaded. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect sling from contact with edges. Avoid exposure to acid, alkali, sunlight and temperature over 180°F. DEATH or INJURY can occur from improper use or maintenance.

WARNING