



Alloy Chain Sling

Single and Double Basket

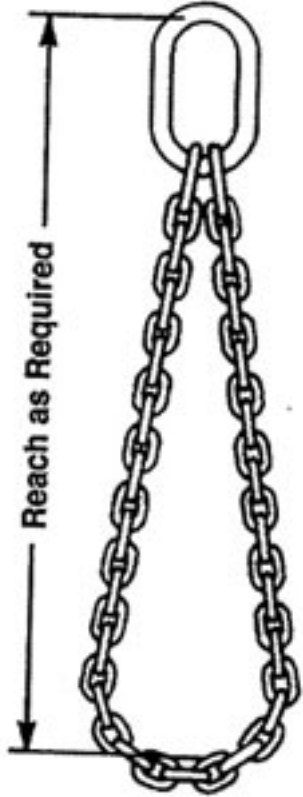

Single Basket

Single Basket										
Chain Size		System	Oblong Master Link						Working Load Limit at 60 °	
			Nominal Size Material		Inside Dimensions					
in.	mm		in.	mm	Width		Length		lb.	kg
					in.	mm	in.	mm		
9/32	7	10	37/64	15	2 1/2	64	5	127	7400	3400
3/8	10	10	13/16	21	3	76	6	152	15200	6900
1/2	13	10	1 1/8	29	4	102	8	203	26000	11800
5/8	16	10	1 1/4	32	4	102	8	203	39100	17700
3/4	20	10	1 5/8	41	5 1/4	133	10 1/2	267	61100	27700
7/8	22	10	1 7/8	48	6	152	12	305	74000	33500
1	26	8	2	51	7	178	14	356	82600	37900
1 1/4	32	8	2 1/4	57	8	203	16	406	125200	56800

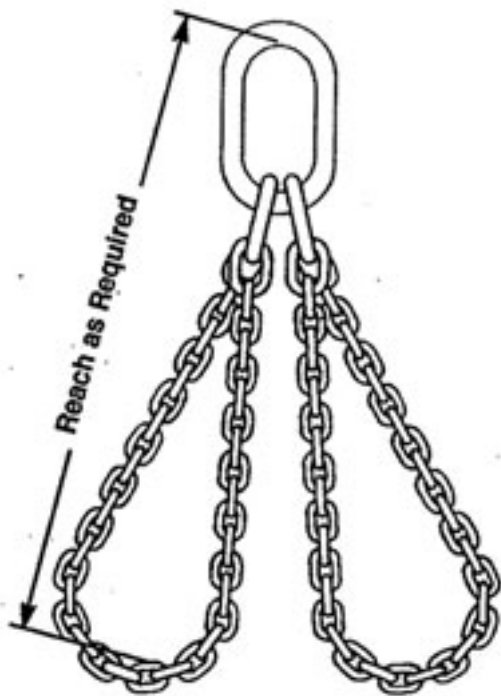

Double Basket

Double Basket										
Chain Size		System	Oblong Master Link						Working Load Limit at 60 °	
			Nominal Size Material		Inside Dimensions					
in.	mm		in.	mm	Width		Length		lb.	kg
					in.	mm	in.	mm		
9/32	7	10	13/16	21	3	76	6	152	11200	5100
3/8	10	10	1 1/8	29	4	102	8	203	22800	10300
1/2	13	10	1 1/4	32	4	102	8	203	39000	17700
5/8	16	10	1 5/8	41	5 1/4	133	10 1/2	267	58700	26600
3/4	20	10	1 7/8	48	6	152	12	305	91700	41600
7/8	22	10	2 1/4	57	8	203	16	406	110900	50250
1	26	8	2 1/4	57	8	203	18	406	123900	56900

For other angles of lift, refer to Type "D" for single basket slings and

Type "Q" for double basket slings.

Dimensions are approximate.

These items are made to order.

⚠️ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠️ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.