



# Alloy Chain Slings

## Single and Double Endless Basket

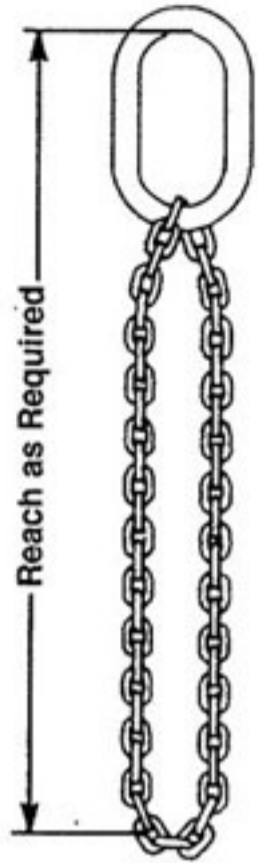

Single Endless Basket

Single Endless Basket										
Chain Size		System	Oblong Master Link						Working Load Limit at 60 °	
			Nominal Size Material		Inside Dimensions					
in.	mm		in.	mm	Width		Length		lb.	kg
					in.	mm	in.	mm		
9/32	7	10	37/64	15	2 1/2	64	5	127	4300	1950
3/8	10	10	13/16	21	3	76	6	152	8800	4000
1/2	13	10	1 1/8	29	4	102	8	203	15000	6800
5/8	16	10	1 1/8	29	4	102	8	203	22600	10300
3/4	20	10	1 1/4	32	4	102	8	203	35300	16000
7/8	22	10	1 5/8	41	5 1/4	133	10 1/2	267	42700	19400
1	26	8	1 7/8	48	6	152	12	305	47700	21600
1 1/4	32	8	2	51	7	178	14	356	72300	32800

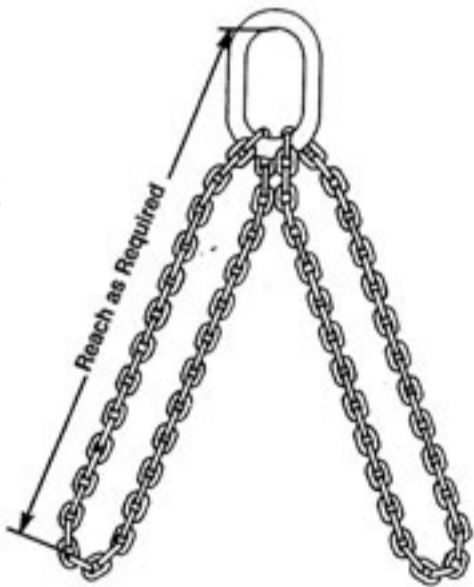

Double Endless Basket

Double Endless Basket										
Chain Size		System	Oblong Master Link						Working Load Limit at 60 °	
			Nominal Size Material		Inside Dimensions					
in.	mm		in.	mm	Width		Length		lb.	kg
					in.	mm	in.	mm		
9/32	7	10	37/64	15	2 1/2	64	5	127	7400	3400
3/8	10	10	13/16	21	3	76	6	152	15200	6900
1/2	13	10	1 1/8	29	4	102	8	203	26000	11800
5/8	16	10	1 1/4	32	4	102	8	203	39100	17700
3/4	20	10	1 5/8	41	5 1/4	133	10 1/2	267	61100	27700
7/8	22	10	1 7/8	48	6	152	12	305	74000	33500
1	26	8	2	51	7	178	14	356	82600	37900
1 1/4	32	8	2 1/4	57	8	203	16	406	125200	56800

For other angles of lift, refer to Type "D" for single basket slings and Type "Q" for double basket slings.  
 Dimensions are approximate.  
 These items are made to order.

**⚠️ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠️ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.