



Alloy Chain Slings

Triple Type: T

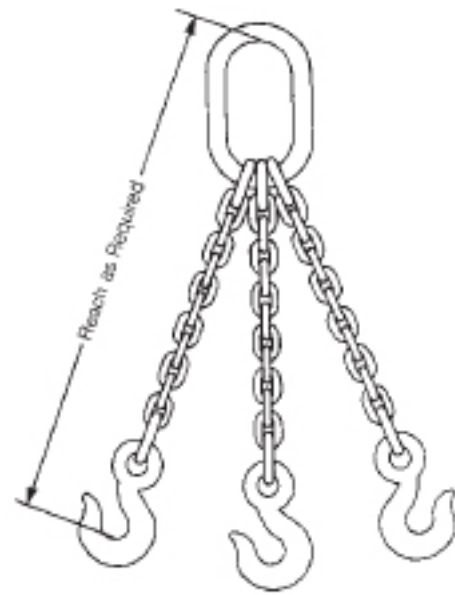

Type TOS

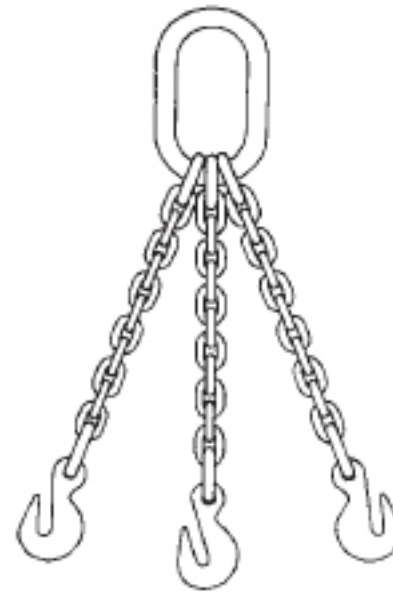

Type TOG

Triple Type: T															
Chain Size		System	Oblong Master Link						Working Load Limit						
			Nominal Size Material		Inside Dimensions				Double at 60°		Double at 45°		Double at 30°		
			in.	mm	in.	mm	Width		Length		lb	kg	lb	kg	lb
				in.	mm	in.	mm								
9/32	7	10	13/16	21	3	76	6	152	11200	5100	9100	4100	6450	2900	
3/8	10	10	1 1/8	29	4	102	8	203	22800	10300	18600	8400	13200	6000	
1/2	13	10	1 1/4	32	4	102	8	203	39000	17700	31800	14400	22500	10200	
5/8	16	10	1 5/8	41	5 1/4	133	10 1/2	267	58700	26600	47900	21700	33900	15400	
3/4	20	10	1 7/8	48	6	152	12	305	91700	41600	74900	34000	53000	24000	
7/8	22	10	2 1/4	57	8	203	16	406	110900	50250	90600	41050	64000	29050	
1	26	8	2 1/4	57	8	203	16	406	123900	56900	101200	46500	71500	32800	
1 1/4	32	8	2 3/4	70	9	229	16	406	187800	85200	153400	69600	108400	49200	

Dimensions are approximate.

Single chain slings are available in other combinations.

These items are made to order.

⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.