
### **Basic Sling**

# **Types**

### Type 1


The Web Fitting functions both as a triangle and chocker. No more need to position the sling before chocking the load. Fits larger crane hooks than TC and TT sling fittings.

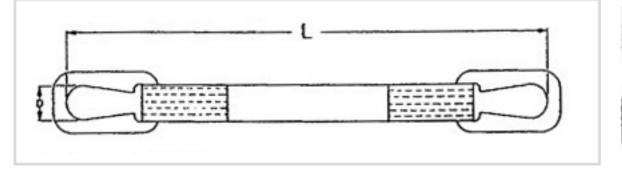


# **Hitches**


Chocker

Basket




Vertical






#### Type 1 TC **Slings**

Slings with a triangle on one end and with a slotted triangle (the chocker) on the other end. Choice of lightweight aluminum or durable steel fittings.

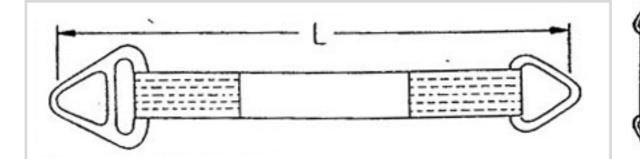







#### Type 2 TT **Slings**


Slings with a triangle at both ends. Used in vertical and basket hitches only. Choice of lightweight aluminum or durable steel fittings.

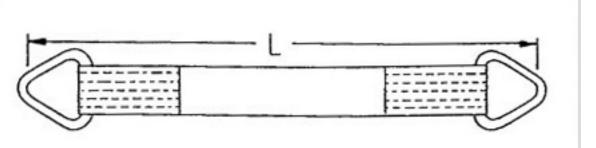




#### Type 3 EE **Slings**

Slings with an eye at both ends. Choice of straight or tapered eyes (tapered eyes are standard for 3" webwidth and up)

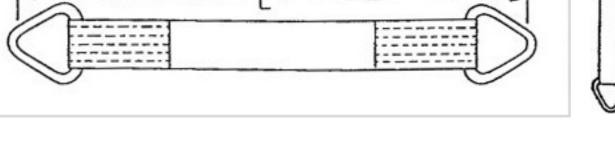





#### Type 4 EE **Slings**

Same basic type as Type 3, but the eyes are twisted to a right angle to the sling body. (Tapered eyes are standard for 2" web-width and up).









#### Type 5 EN **Slings**

Endless slings, also referred to as grommet slings. Is the most versatile sling.





#### Type 6 RN Slings

Return eye sling, also referred to as reversed eye sling. Sling body is formed by 2 parts of webbing sewn side by side using a cordura tube which protects not only the sling edges, but the entire sling body.

