


Alloy Chain Slings

Double with Links Only

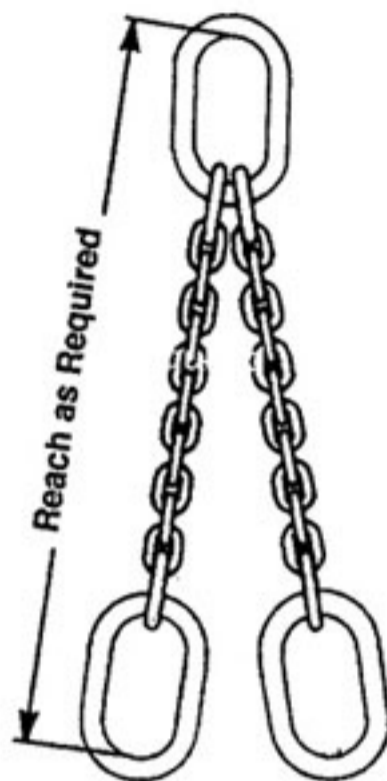

Type D00

Double with Links Only																Working Load Limit at 60 °	
Chain Size		System	Oblong Master Link						Standard Oblong End Link								
			Nominal Size Material		Inside Dimensions				Nominal Size Material		Inside						
			in.	mm	in.	mm	Width		Length		in.	mm	Width		Length		
				in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
9/32	7	10	37/64	15	2 1/2	64	5	127	37/64	15	2 1/2	64	5	127	7400	3400	
3/8	10	10	13/16	21	3	76	6	152	13/16	21	3	76	6	152	15200	6900	
1/2	13	10	1 1/8	29	4	102	8	203	1 1/8	29	4	102	8	203	26000	11800	
5/8	16	10	1 1/4	32	4	102	8	203	1 1/8	29	4	102	8	203	39100	17700	
3/4	20	10	1 5/8	41	5 1/4	133	10 1/2	267	1 1/4	32	4	102	8	203	61100	27700	
7/8	22	10	1 7/8	48	6	152	12	305	1 5/8	41	5 1/4	133	10 1/2	267	74000	33500	
1	26	8	2	51	7	178	14	356	1 7/8	48	6	152	12	305	82600	37900	
1 1/4	32	8	2 1/4	57	8	203	16	406	2	51	7	178	14	356	125200	56800	

Dimensions and weights are approximate.
 For other angles of lift, refer to Type "D" slings.
 These items are made to order.

⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.