


Alloy Chain Slings


Single Types: D




Type DOS

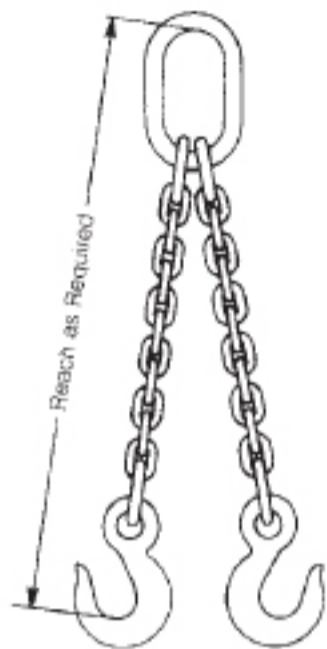

Type DOG

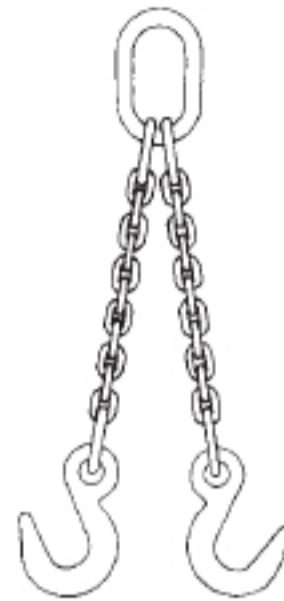

Type DOF

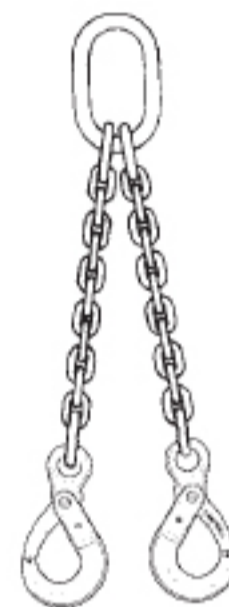

Type DOSL

Double Type: D

Chain Size		System	Oblong Master Link						Working Load Limit					
			Nominal Size Material		Inside Dimensions				Double at 60°		Double at 45°		Double at 30°	
			in.	mm	Width		Length		lb	kg	lb	kg	lb	kg
		in.	mm	in.	mm	in.	mm							
9/32	7	10	37/64	15	2 1/2	64	5	127	7400	3400	6100	2700	4300	1950
3/8	10	10	13/16	21	3	76	6	152	15200	6900	12400	6900	8800	3990
1/2	13	10	1 1/8	29	4	102	8	203	26000	11800	21200	9600	15000	6800
5/8	16	10	1 1/4	32	4	102	8	203	39100	17700	32000	14500	22600	10300
3/4	20	10	1 5/8	41	5 1/4	133	10 1/2	267	61100	27700	49900	22600	35300	16000
7/8	22	10	1 7/8	48	6	152	12	305	74000	33500	60400	27350	42700	19400
1	26	8	2	51	7	178	14	356	82600	37900	67400	31000	47700	21600
1 1/4	32	8	2 1/4	57	8	203	16	406	125200	56800	102200	46400	72300	32800

Dimensions are approximate.

Single chain slings are available in other combinations.

These items are made to order.

⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.